

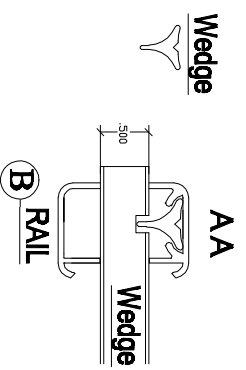
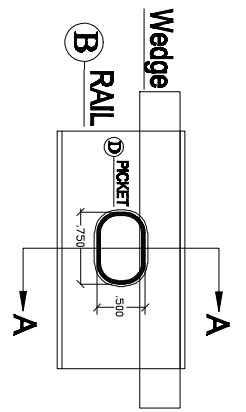
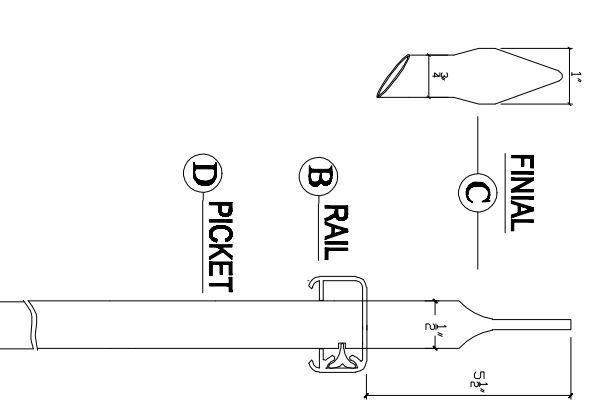
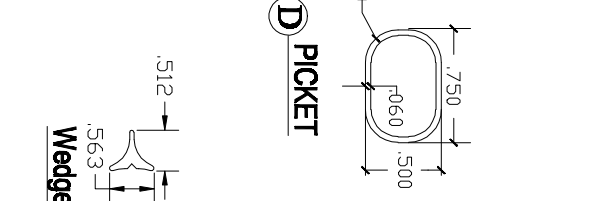


(MODEL B)

VICTORY LINE
N.T.S.

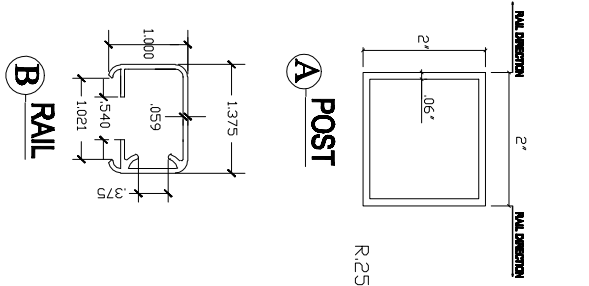

GENERAL NOTES

1. ALL FENCE COMPONENTS SHALL BE AS MANUFACTURED BY SWEDGE LOCK ALUMINUM GREENVILLE SOUTH CAROLINA INSTALLATION SHALL BE IN STRICT ACCORDANCE WITH MANUFACTURERS PLANS AND SPECIFICATIONS.
2. MATERIAL S: EXTRUDED ALUMINUM 6063-T6 /6061 T6 ALLOY AND TEMPER CONCRETE: 2,800 PSI PEA ROCK SAGRETE OR EQUAL.
3. FINISH ALL ALUMINUM MEMBERS TO RECEIVE AN ACRYLIC ESP FINISH.
4. OVERALL DIMENSIONS SHOWN ARE MANUFACTURERS STANDARD PRODUCTION SIZES.
5. SWEDGE LOCK FENCES MEET OR EXCEED ALL APPLICABLE REQUIREMENTS OF THE 2007 FLORIDA BUILDING CODE & 2009 LATEST SUPPLEMENT.

MADE IN U.S.A.

Swedge Lock
Aluminum
Fence and Railing

211 RIVERSIDE CT. GREER, S.C. 29560
TEL: 888-754-2301 FAX: 888-316-4626