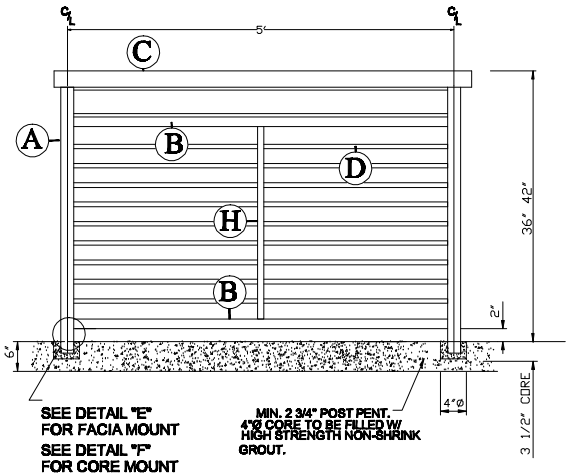

SEE DETAIL "E" FOR FACIA MOUNT
SEE DETAIL "F" FOR CORE MOUNT
SEE DETAIL "G" FOR DECK MOUNT

MIN. 2 3/4" POST PENT. 4"X2 CORE TO BE FILLED W/ HIGH STRENGTH NON-SHRINK GROUT.

ELEVATION N.T.S.



E POST FACIA MOUNT





F CORE MOUNT



A POST



B Industral Rail Pinstripe

D Tube Picket

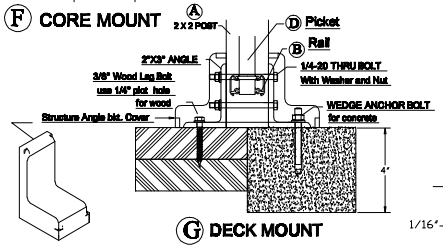

G DECK MOUNT

HORIZONTAL RAILING MERIDIAN E STYLE

GENERAL NOTES

1. ALL FENCE COMPONENTS SHALL BE AS MANUFACTURED BY SWEDGE LOCK ALUMINUM GREENVILLE SOUTH CAROLINA INSTALLATION SHALL BE IN STRICT ACCORDANCE WITH MANUFACTURERS PLANS AND SPECIFICATIONS.
2. MATERIALS: EXTRUDED ALUMINUM 6063-T6 /6061 T6 ALLOY AND TEMPER CONCRETE : 2,500 PSI PEA ROCK SACRETE OR EQUAL
3. FINISH ALL ALUMINUM MEMBERS TO RECEIVE AN ACRYLIC ESP FINISH.
4. OVERALL DIMENSIONS SHOWN ARE MANUFACTURER'S STANDARD PRODUCTION SIZES.
5. SWEDGE LOCK FENCES MEET OR EXCEED ALL APPLICABLE REQUIRMENTS OF THE 2007 FLORIDA BUILDING CODE & 2009 LATEST SUPPLEMENT.

C Continuous Top Cap Options

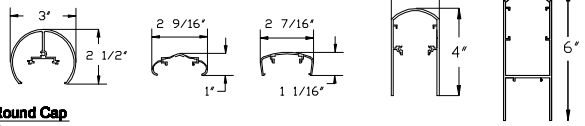



3" Round Cap C Rail



Dixie Cap C Rail



Trad Cap C Rail



2"X4"Cap C Rail



2"X6"Cap C Rail



H Sq. Tube Picket

MADE IN U.S.A.

Swedge Lock

Aluminum

Fence and Railing

211 Riverside Ct. Greer, S.C. 29560
TEL: 888-754-2301 FAX: 888-316-4626